


1. Set the TV-RGB Switch Setting


- A. RGB outputs the signal to RGB and DVI-I OUPUT port of M50.
- B. TV outputs the signal from RS232/CVBS port thru RCA connection.

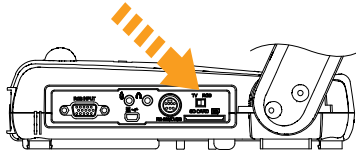

2. Connect the Video Output Display


A. RGB Connection

- (1) RGB Cable (2) LCD/DLP Projector

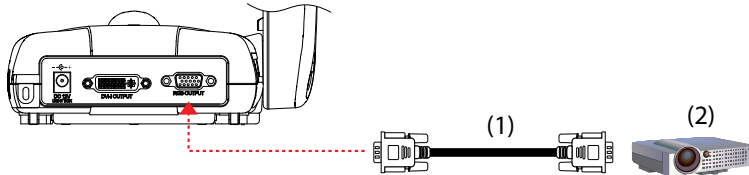


B. TV Connection

- (1) RS-232/CVBS Cable (2) RCA Cable (3) RCA to SCART Cable (Not supplied) (4) Television

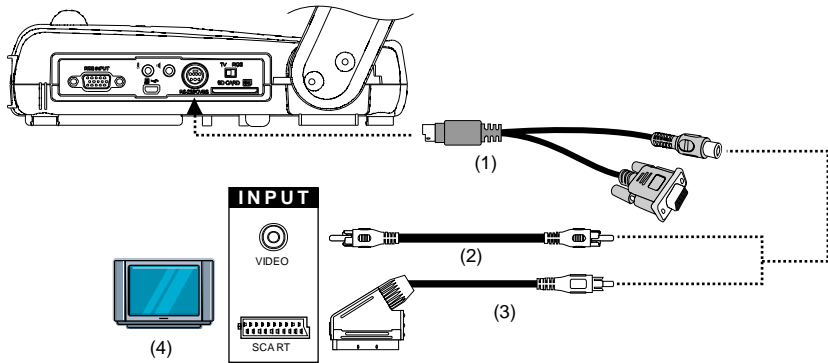


3. Connect the Power

- (1) Power Adapter (2) Power Cord (3) Wall Outlet

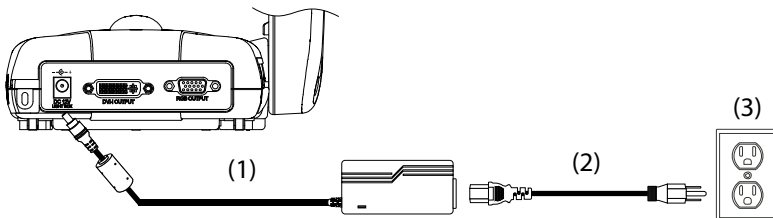


4. Set the OSD Language

Press MENU, select SYSTEM > LANGUAGE, then press ENTER and choose the language setting you prefer.

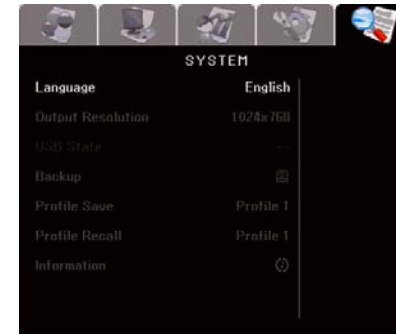


5. Connect a Computer to Show Computer Presentation






- (1) RGB Cable (2) Laptop (3) Desktop

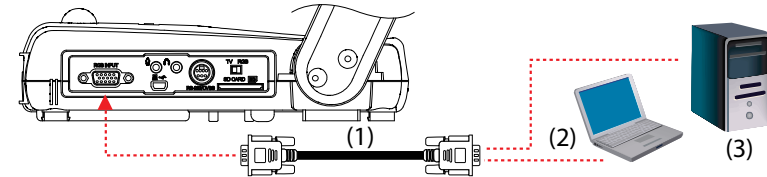



6. Connect via USB to Transfer the Captured Image to a PC or Use M50 as a USB Camera with the bundled software.

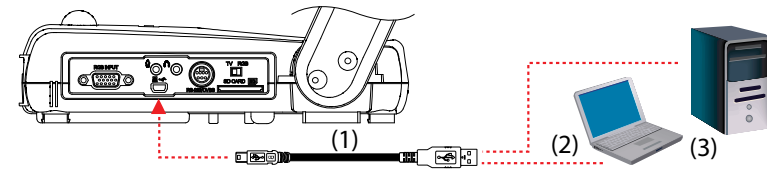
- (1) USB Cable (2) Laptop (3) Desktop

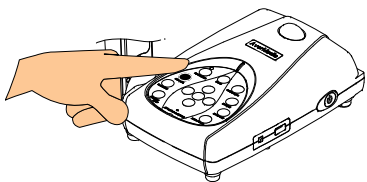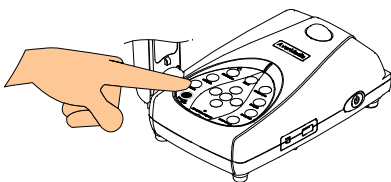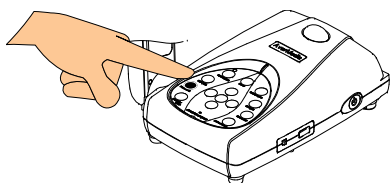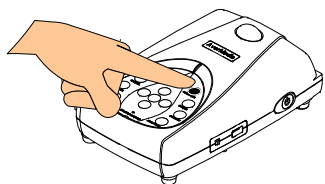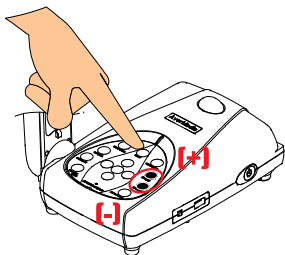



7. Basis Operation

- Press  to zoom in and  to zoom out the image.


- Press  to adjust the focus automatically.


- Press **CAMERA/PC** to switch between Camera and Computer mode.


For laptop, make sure to switch the output display to an external video output device. Refer to the laptop keyboard command (FN+F5) to switch between display outputs.



- Press  to view the captured image from the memory.

To start slide show, press **SLIDE SHOW** on the remote.

- Press  to pause or resume the live image from the camera or stop video playback.

- Press  to capture and save the image in the built-in memory. In playback mode, use this to delete the selected file.

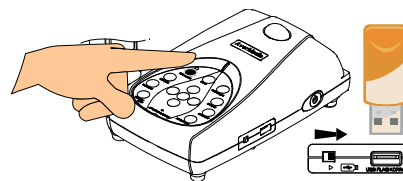

- Press  to start/stop audio & video recording with either USB flash drive or SD memory card. If USB flash drive is used, make sure  switch is set to the right.